

# DK50 2X4VR/110


## 8-16 dental units

**DK50 2x4VR/110**  
without soundproofing box ■

**DK50 2x4VR/110 S**  
with soundproofing box ■

**DK50 2x4VR/110/M**  
without soundproofing box ■  
with npsl dryer

**DK50 2x4VR/110 S/M**  
with soundproofing box ■  
with npsl dryer

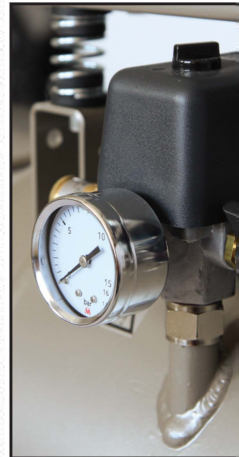

Technical specification	DK50 2x4VR/110	DK50 2x4VR/110/M
Nominal voltage / frequency	3x400V/ 50Hz	
Compressor efficiency	515 l.min <sup>-1</sup> / 6 bar	390 l.min <sup>-1</sup> / 6 bar *
Motor performance	2 x 2,2 kW	
Air tank capacity	110 l	
Working pressure	6 - 8 bar	
Mode of operation	S1 - 100%	
Noise level	75 dB(A)	
Weight	136 kg	182 kg
Dimensions (w x l x h)	1090x500x900 mm	1090x605x815

\* Part of the efficiency of compressor is used for regeneration of the dryer.  
Technical modifications are subject to change.